


500081 PowerFlarm-302- Ultimate

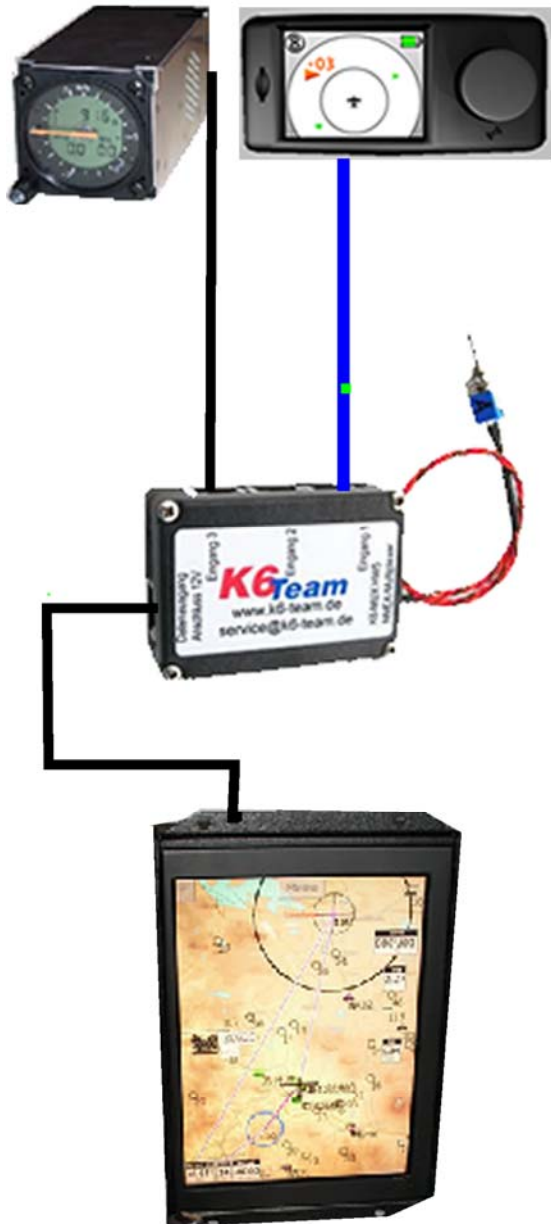

Blue cable 500054 with RJ45 - RJ45
PowerFlarm to MUX data. 12v
Green 500052 cable to 302 MUX
Black 500053 cable supplies 12v to
 MUX & PowerFlarm & 5v to the Ipaq.
Switch 3 positions for direct
Communication as programmed.
 Here: PowerFlarm = A
 B = CAI302.
 Center = flying

PowerFlarm - CAI 302 - Ultimate

K6-Team NMEA-Multiplexer			
	Flarm	X	CAI 302
	Input 1	Input 2	Input 3
able MUX	Yes	No	Yes
Baud Rate	auto	4800	4800
N: NMEA	No	No	No
C: Cksum	No	No	No
Sentence	Pass	No	no
P: Special	0	0	0
Sentences	"\$PFL"	" "	" "
	" "	" "	" "
A: Add	" "	" "	" "
D: Delete	" "	" "	" "
	" "	" "	" "
	" "	" "	" "
	" "	" "	" "
	" "	" "	" "
	" "	" "	" "
	" "	" "	" "
O: Output Baudrate		19200	
F: Flight Forward Menu			
M: Communications Menu			
U: Upload Menu			
Data Forward during Flight			
O: Output RX Data	to Input 3 TX		
I: Input Data	[no forwarding]		PDA>302
M: Main Menu			
Direct communications selected by J3			
A:	Com 1 [1-2 Out <> Input 1		Flarm
B:	Com 2 [2-3 Out <> Input 3		CAI 302
C:	Com 3 [4-5 Out <> Input 1		
D:	Com 4 [5-6 Out <> Input 1		
M: Main Menu			